


The TERA Retractable System provides the user with a designer cover that allows the outdoor area to be used all year round. The system offers a wind rating up to 117km/h and offers protection from the elements.

The system is custom manufactured using high grade 6063 extruded aluminium profiles and is finished with thermoset powder coating which provides superior overall performance for exterior applications. All fixings are high grade stainless steel to ensure extended life.

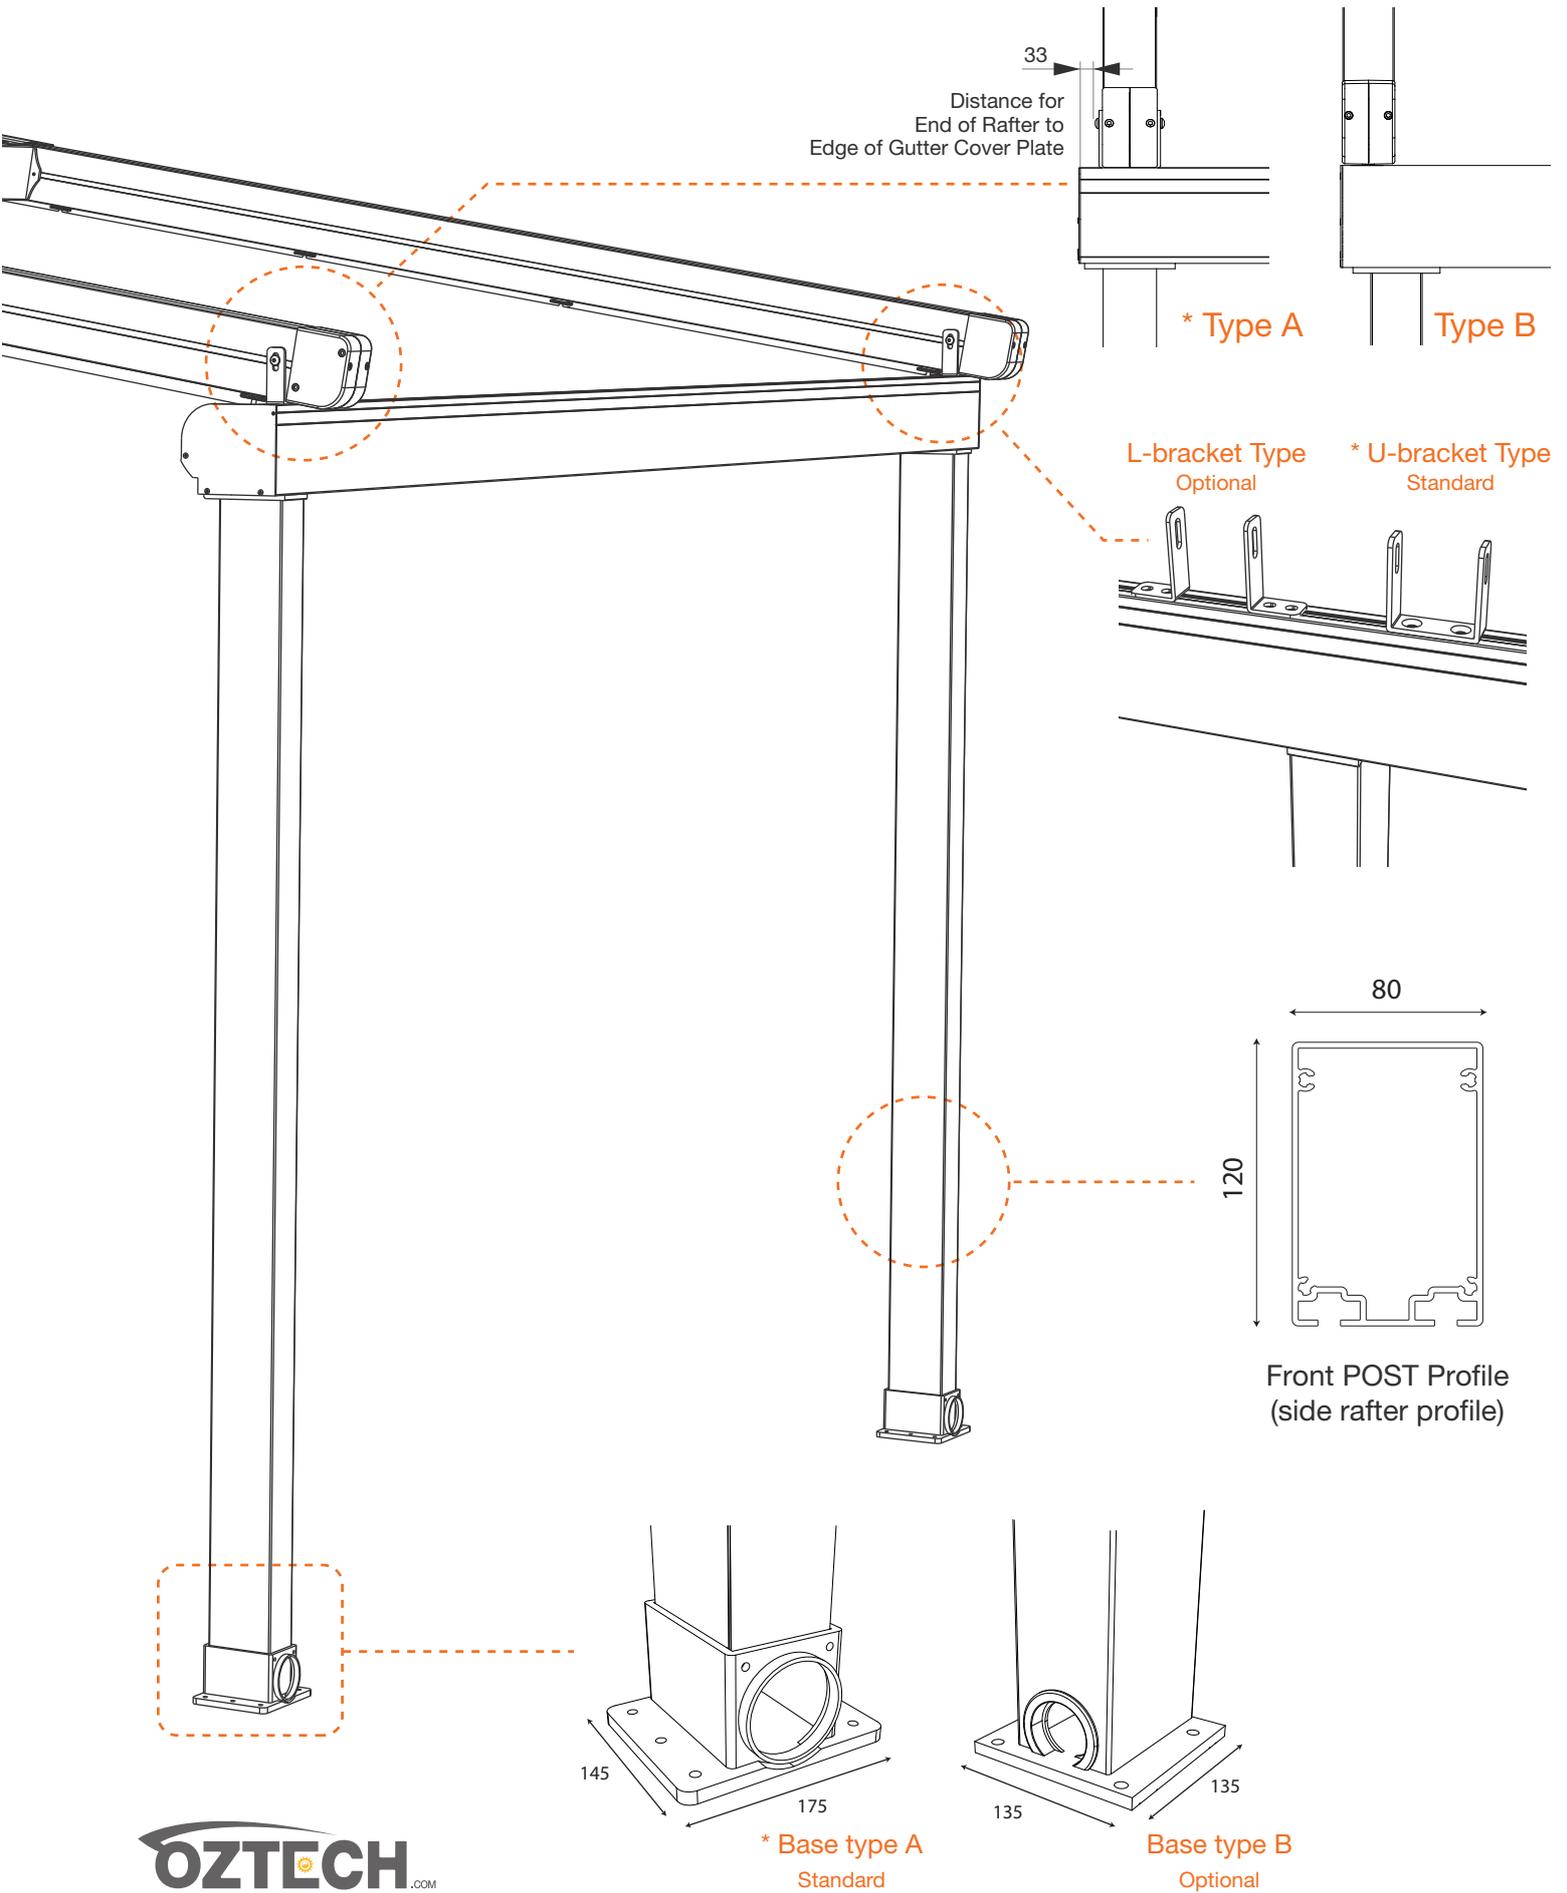


### Single Module

**Width. 2m > 5m**

Single module with  
single motor & 2 rafters

Projection. Max.7m

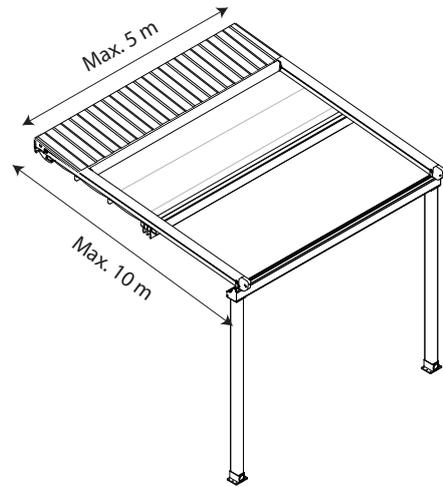


### Double Module

**Width. 5m > 9m**

Double modules with  
single motor & 3 rafters

Projection. Max.7m

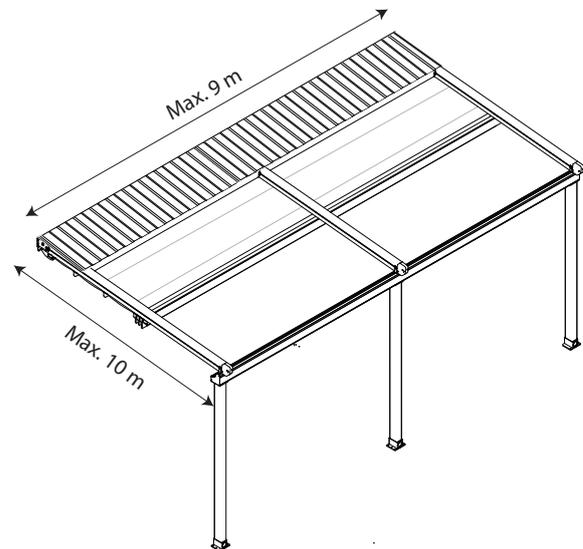



### Triple Module

**Width. 9m > 13m**


Triple modules with  
single motor & 4 rafters

Projection. Max.7m

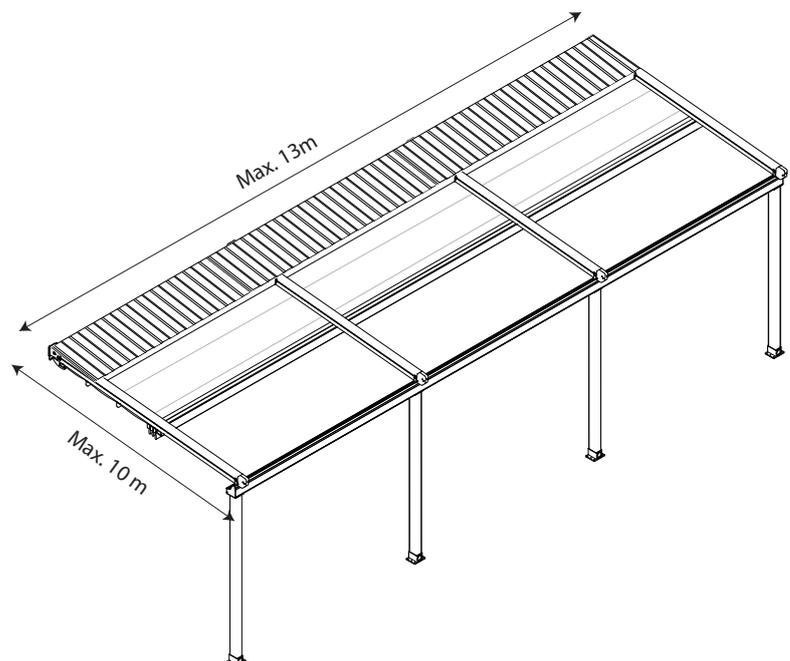


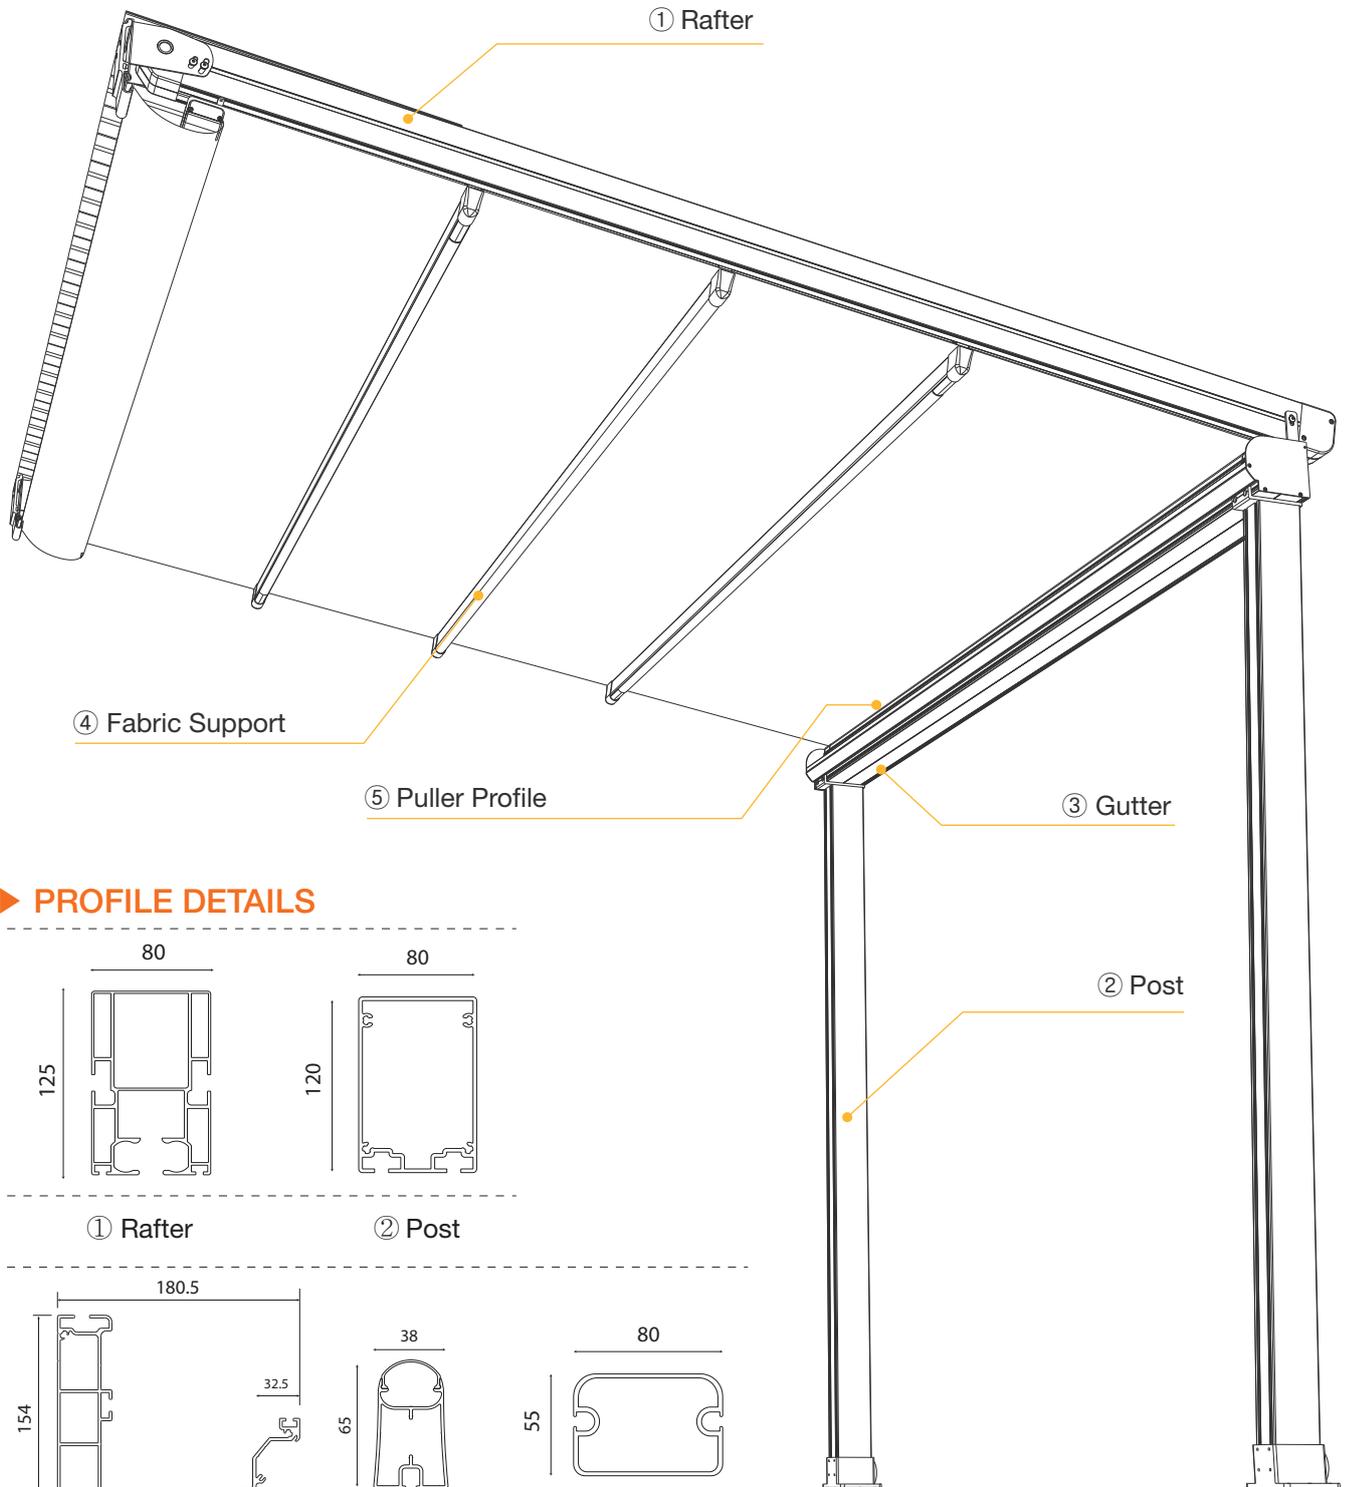


### ► PROFILE DETAILS




① Rafter




② Post




③ Gutter




④ Fabric Support For Lighting






⑤ Puller Profile

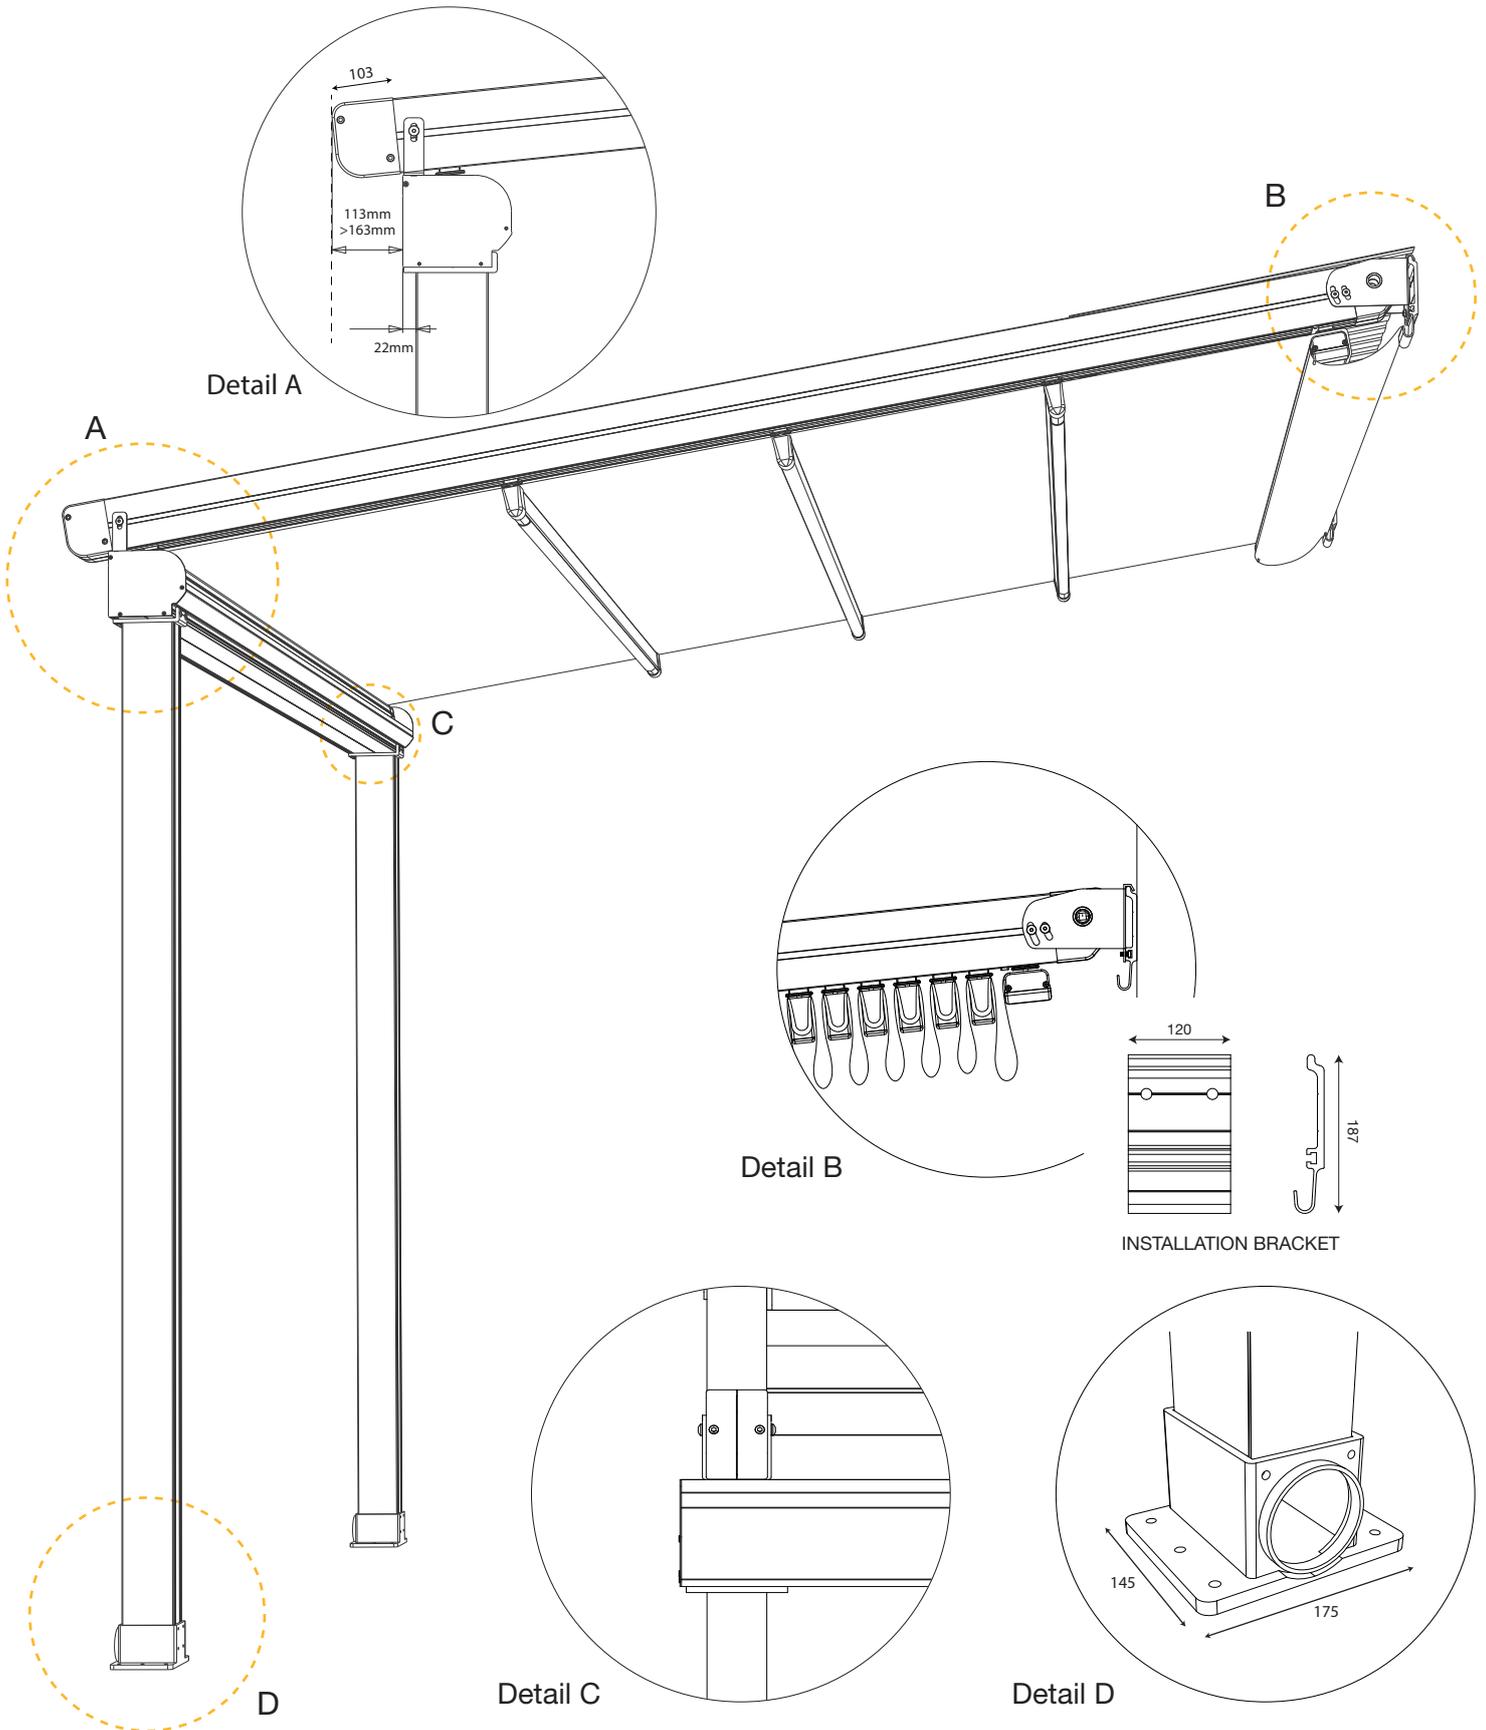

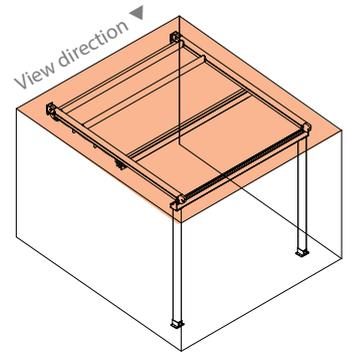



## A. Width

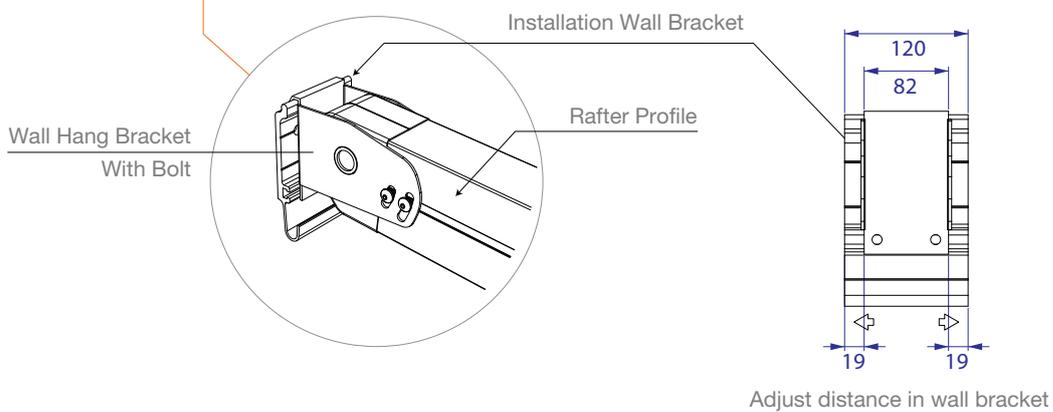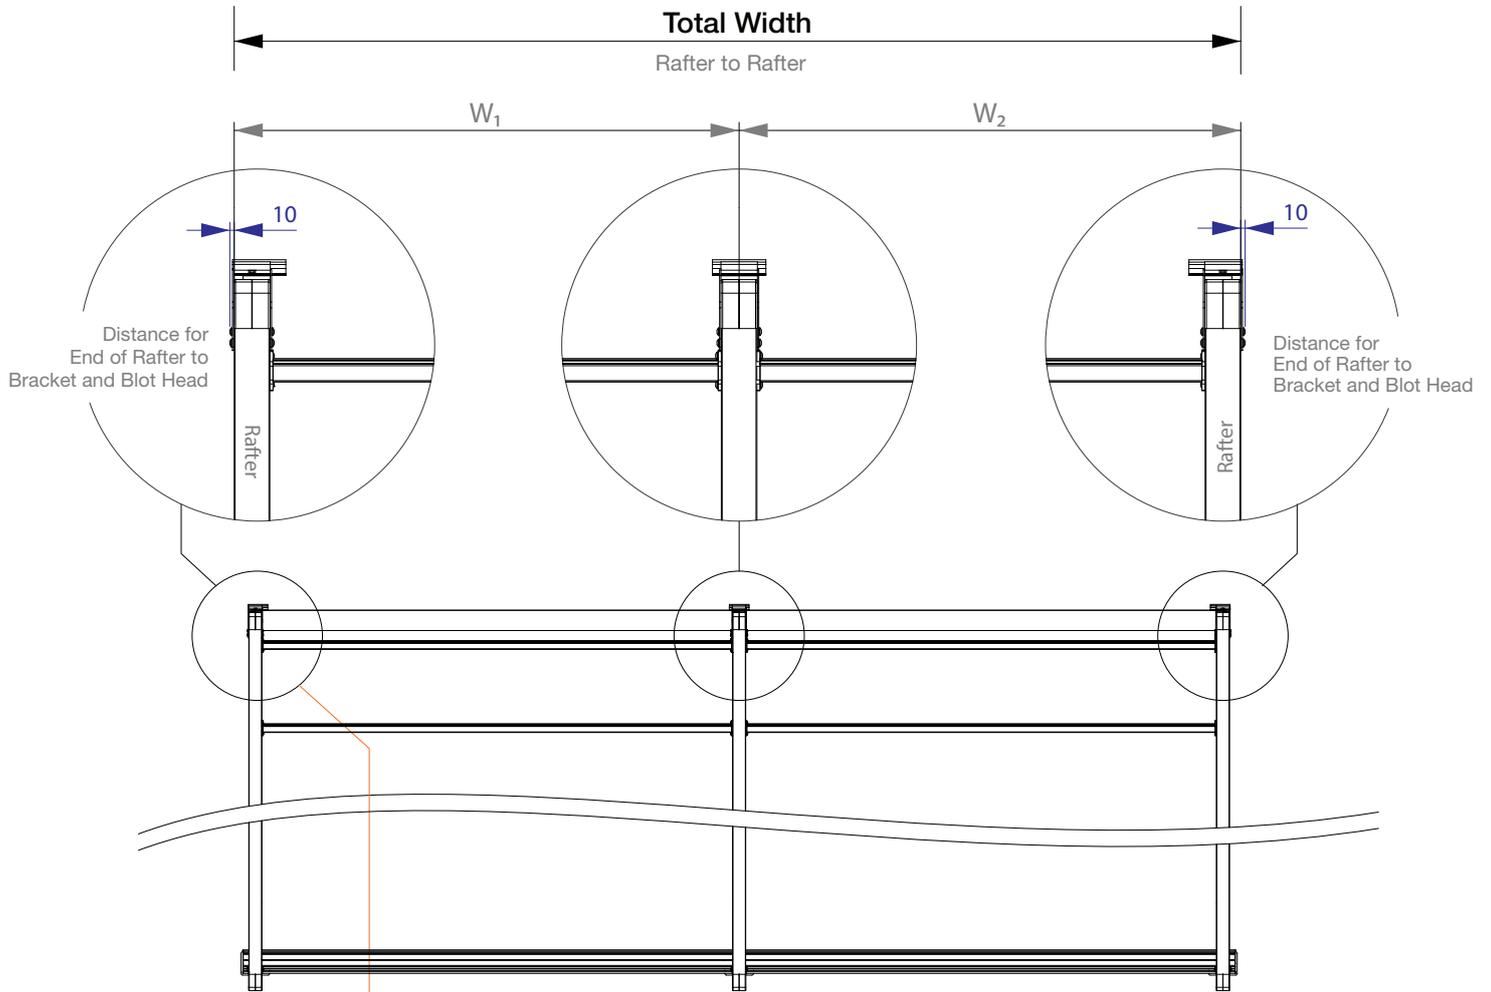

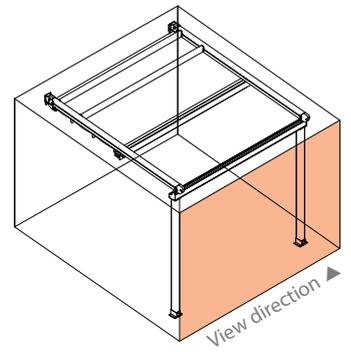


## A. Width

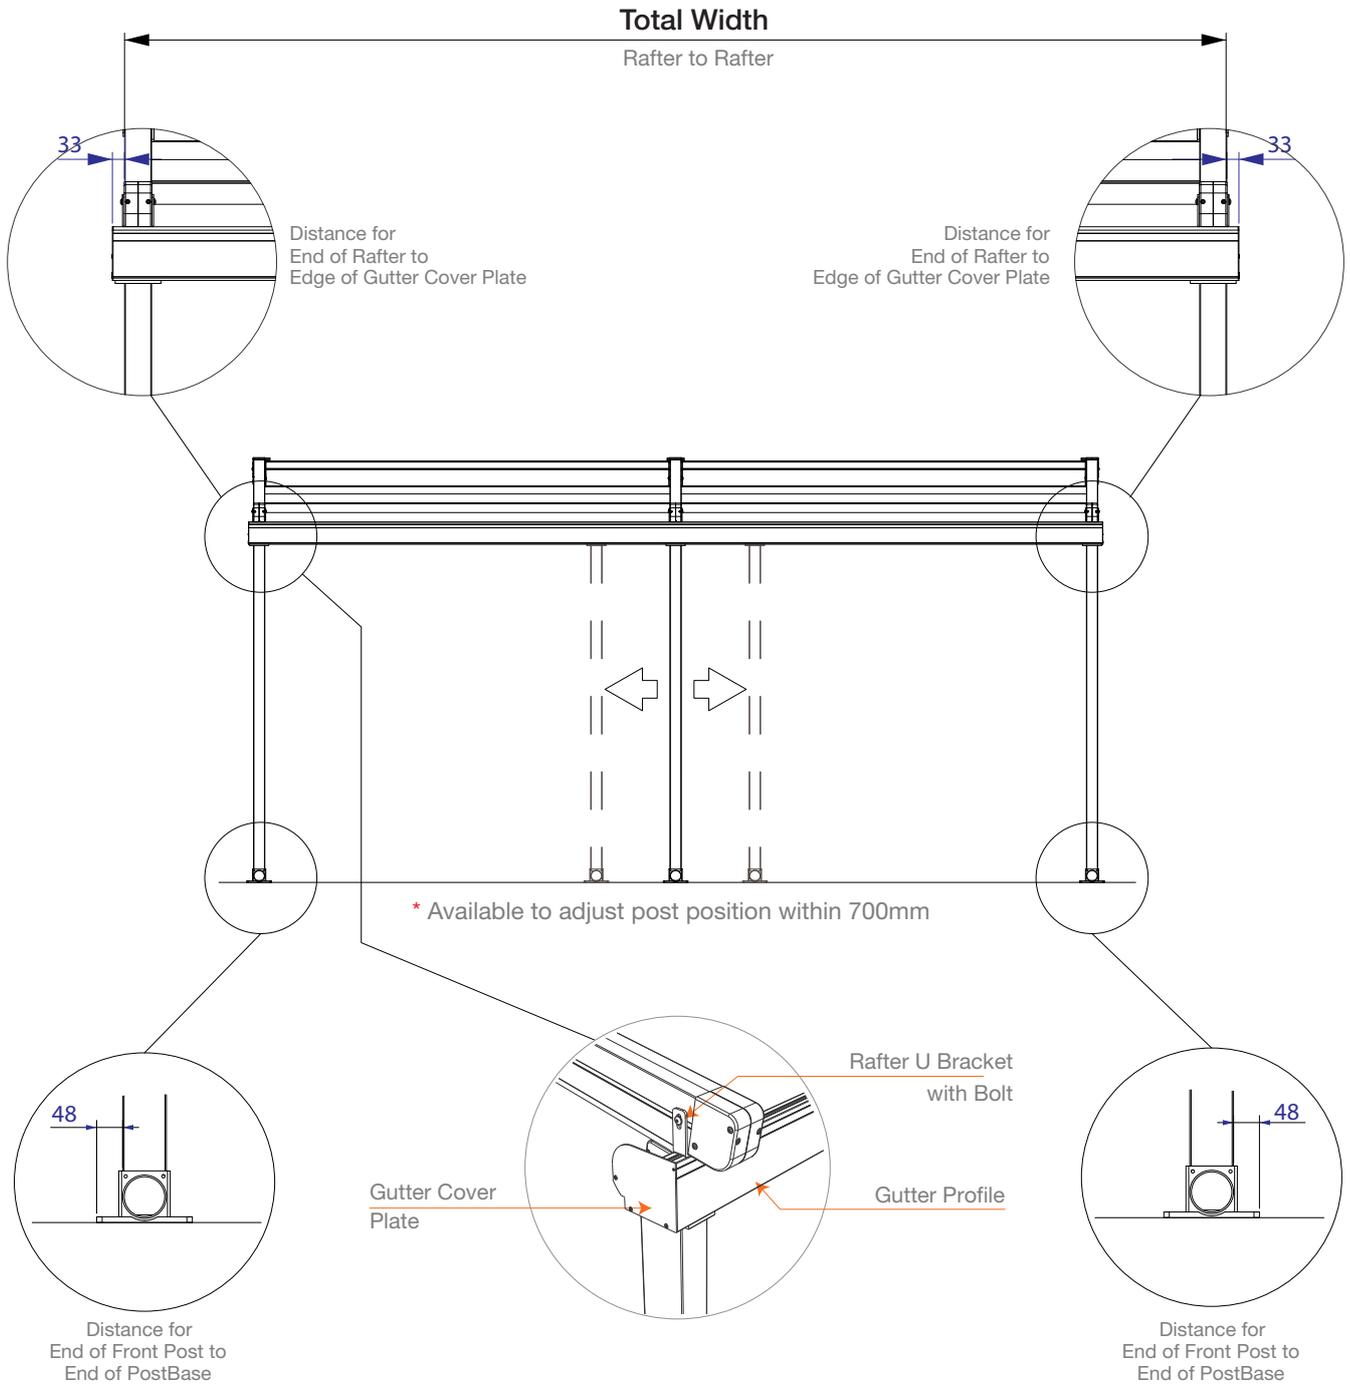

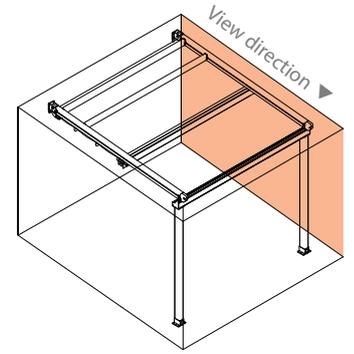

## B. Projection & Height

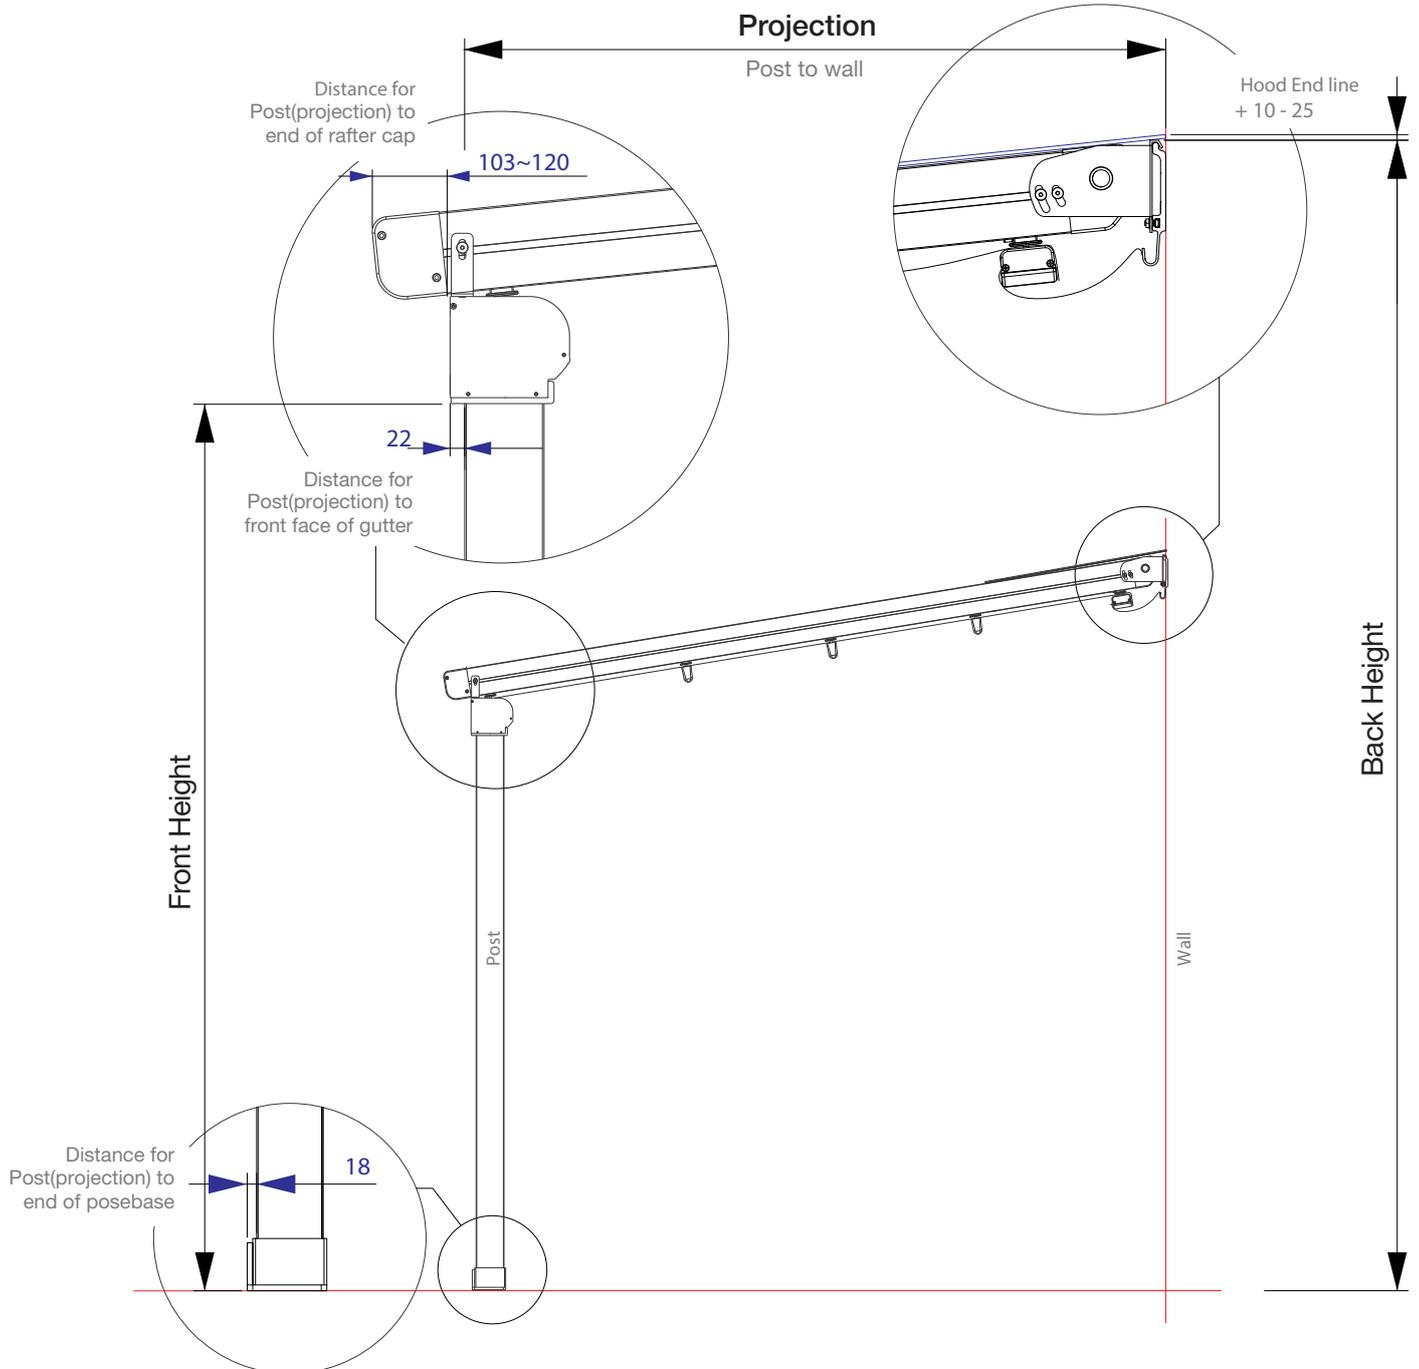

## C. Angle


TERA	Module Width													
	2.0 M	fall	2.5 M	fall	3.0 M	fall	3.5 M	fall	4.0 M	fall	4.5 M	fall	5.0 M	fall
2.0 M	2.7 °	379	3.5 °	407	4.5 °	442	5.0 °	460	5.7 °	485	6.0 °	495	7.0 °	531
3.0 M	2.7 °	426	3.5 °	468	4.5 °	521	5.0 °	547	5.7 °	584	6.0 °	600	7.0 °	653
4.0 M	2.7 °	474	3.5 °	530	4.5 °	600	5.0 °	635	5.7 °	684	6.0 °	705	7.0 °	776
5.0 M	3.4 °	585	4.5 °	679	5.5 °	766	6.0 °	811	6.0 °	811	6.5 °	855	7.5 °	943
6.0 M	3.4 °	645	4.5 °	757	5.5 °	863	6.0 °	916	6.0 °	916	7.5 °	1075	8.5 °	1182
7.0 M	3.4 °	705	4.5 °	836	5.5 °	959	6.0 °	1021	7.0 °	1144	7.5 °	1207	8.5 °	1331

Projection


If lesser pitch than above table is required, please contact our staff for more details.

## D. Option

### 1. Type

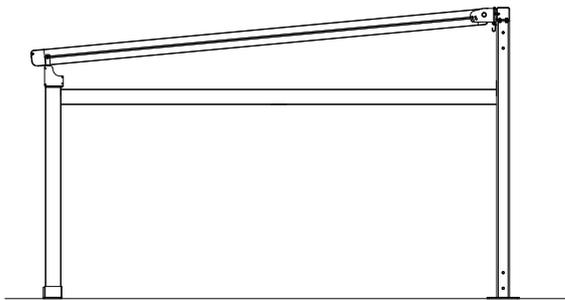


a. Freestanding

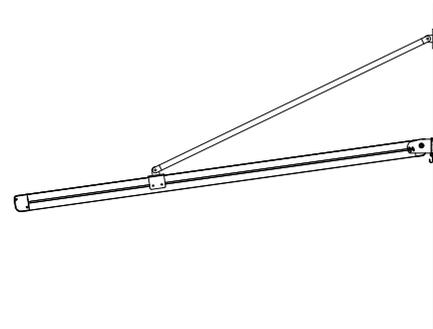


b. Cantilever

### 2. Rafter Bracket

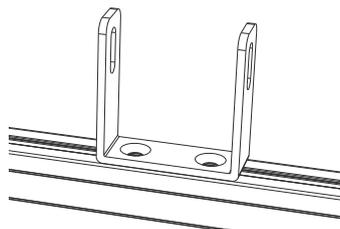


a. Rafter U brakcet

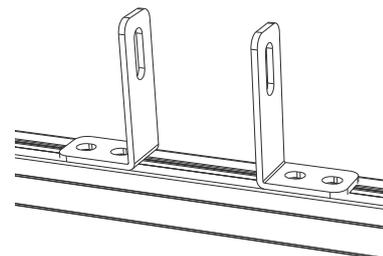

b. Rafter L brakcet


## D. Option

### 3. LED Lighting system




a. UNI LED

- LED Length - 265mm
- Quantity - 2 per module(available 3 per module)
- Layout - 1, 3, 5, 7, 9, 11, 13, 15, 17, 19 middle line
- ※ Please contact us if you want to customize LED layout



b. MAXI LED

- LED Length - 600 ~ 5,400mm
- Quantity - 1 per module
- Layout - 1, 4, 7, 10, 13, 16, 19, 22 middle line
- ※ Please contact us if you want to customize LED layout

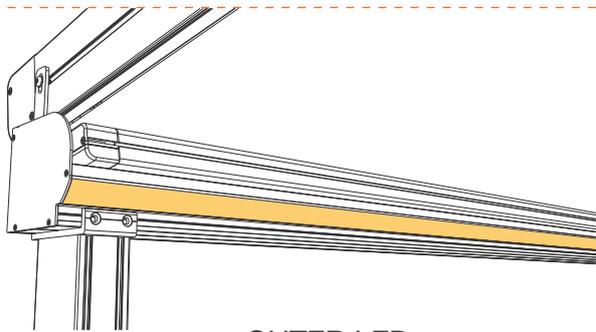

c. GUTTER LED

- LED Length = Gutter Length
- Quantity - 1 line(Harbour - 2)

#### ★ Please choose one lighting system

- 1) UNILED ONLY
- 2) MAXI LED ONLY
- 3) UNILED + GUTTER LED
- 4) MAXI + GUTTER LED

♣ LED color - natural(4000~4500k)

♣ Available dimming function